



MIPRO

User Guide

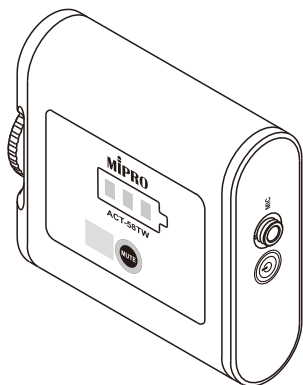


ACT-58TW
5 GHz Digital Bodypack Transmitter

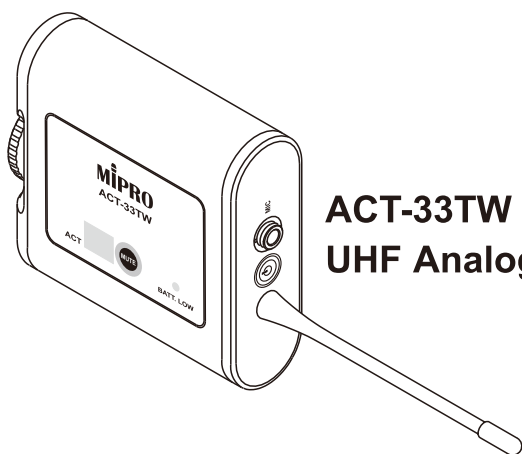


ACT-33TW
UHF Analog Bodypack Transmitter

Parts Name


ACT-58TW

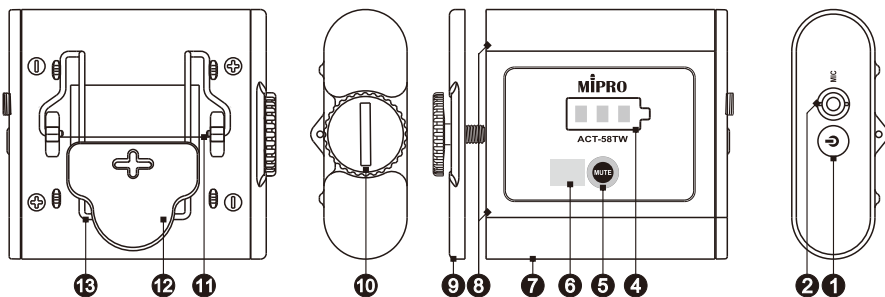

ACT-33TW

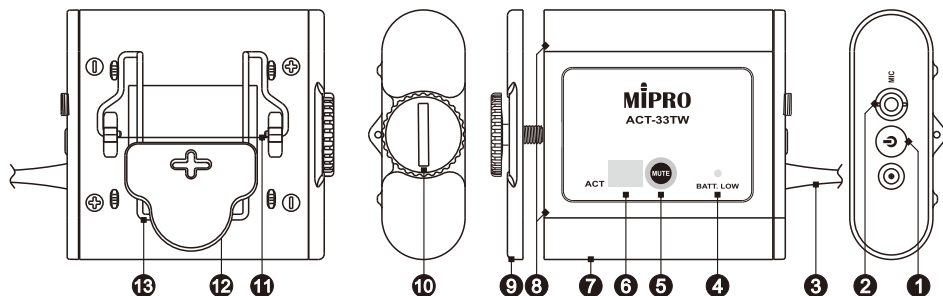


- ① Power Button
- ② Mic In Jack
- ③ Antenna (ACT-33TW)
- ④ Battery Gauge (ACT-58TW)
Power Indicator (ACT-33TW)
- ⑤ Mute Button and Indicator
- ⑥ ACT Sync Window
- ⑦ Main Chassis
- ⑧ Battery Compartment
- ⑨ Battery Cover
- ⑩ Thumb Screw Fastener
- ⑪ Belt Clip Hinges
- ⑫ The Locking Piece
- ⑬ Belt Clip (installed as shown below)

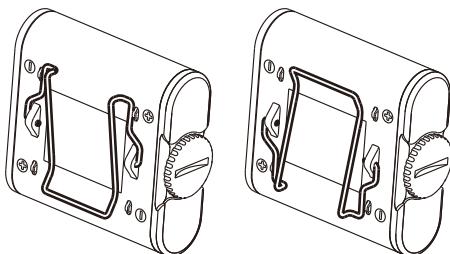


Battery Installation

1. Battery Installation:

- Turn the thumb screw fastener ⑩ in a counter-clockwise direction to unscrew. Rotate the battery cover to reveal the battery compartment.
- Insert two AA batteries in the correct direction as shown on the case.

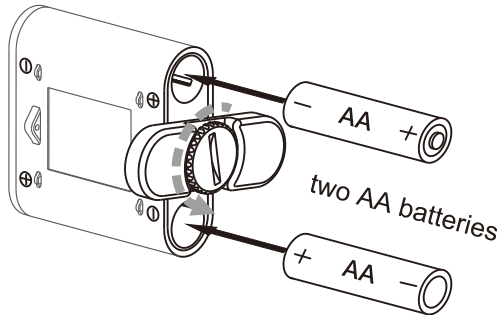


2. Insert the batteries and press the power button. If the Battery Gauge (ACT-58TW) / Power Indicator (ACT-33TW) does not light up, the batteries may be dead or inserted incorrectly. Please identify the problem and try again.

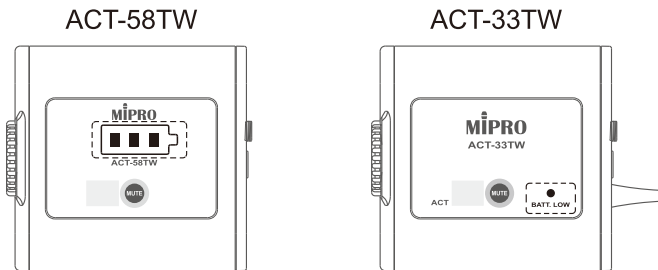

3. When the transmitter is not in use, please turn off the power to avoid power drain. If the transmitter is not in use for an extended period of time, please remove the batteries to prevent product damage from battery leakage. The factory warranty is automatically voided for malfunctioning products caused by battery leaks.


How to Use

1. Before turning on the power, insert the plug of the signal source into the Mic In Jack and securely tighten the plug to prevent noises caused by a loose connection.

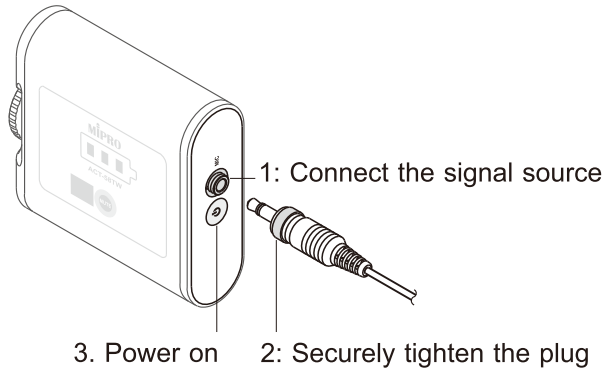


2. Power On/Off and Display

- ACT-58TW
- Hold the power button **1** to turn the transmitter on or off. The battery gauge **4** turns on when powered on and goes out when powered off.

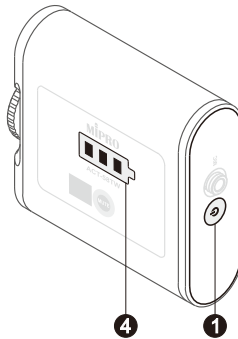


- The meanings of the battery gauge indicator are given below. When battery is low, the red indicator is shown and the batteries should be replaced as soon as possible. If the voltage is too low, the transmitter will automatically shut down.

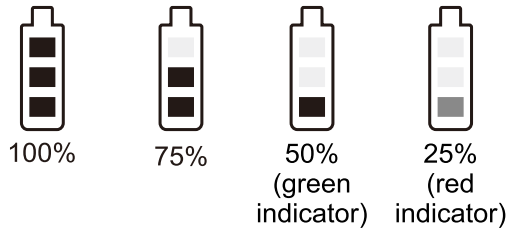


- ACT-33TW

- Hold the power button **1** to turn the transmitter on or off. The power indicator **4** lights up in green when powered on and goes out when powered off.
- Battery indicator **4** : Green indicator denotes normal; red indicator denotes low battery and the batteries should be replaced as soon as possible.
If the voltage is too low, the transmitter will automatically shut down.
- During ACT, if the indicator **4** light is flashing, it means that the transmitter and receiver have different frequency bands. Check the frequency band codes shown on the stickers on the transmitter and receiver.

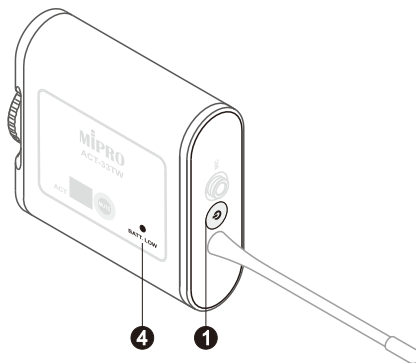


3. Mute:

- Mute button: The mute button toggles between mute (indicator ⑤ is on) and un-mute (indicator is off).




- Mute Lock/Unlock: With the transmitter powered off, hold down the mute button ⑤ and press the power button ① simultaneously to toggle between mute locked/unlocked. (The default setting is Mute Lock mode)

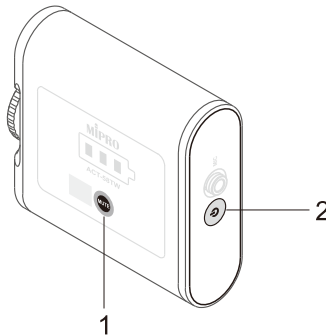

4. Waterproofing instructions: This product is designed according to waterproof standards but must be used in compliance with the following instructions.

- Properly tighten the thumb screw fastener to secure the battery cover and the main chassis:


Use the locking piece or a coin to tighten the thumb screw fastener after inserting or replacing the batteries. Please note that no gap should be visible between the battery cover and the case to ensure waterproof operation.

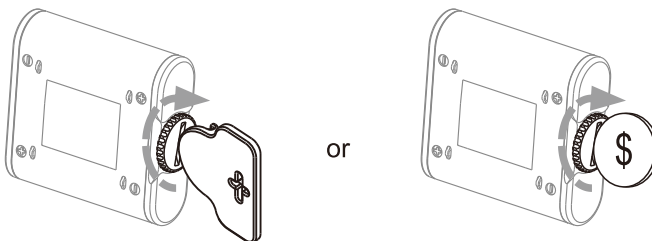

- Use with exclusive waterproof microphones:

Please use the genuine MIPRO MU-57 Series waterproof microphones and make sure that the microphone plugs are securely tightened, thus to avoid liquid enter the transmitter through the jack, resulting in malfunction or failure.

5. The locking piece can also be used as a bracket to support the transmitter on the desk.



Notes

1. Commercially available batteries are intolerant of heat and can become more susceptible to leakage when placed or used under higher temperatures. Please remove the batteries when the product will not be used for a long time.
2. This product is rated IP67. However, it will lose its waterproof properties when submerged in any type of solvent.
3. Please refer to the actual product in the event of product description discrepancy.
4. The frequency range and maximum deviation comply with the regulations of different countries.
5. Spraying alcohol directly onto the condenser capsule module will cause severe damage and invalidate the warranty.



Dispose of any unusable devices or batteries responsibly and in accordance with any applicable regulations.

Disposing of used batteries with domestic waste is to be avoided!

Batteries / NiCad cells often contain heavy metals such as cadmium(Cd), mercury(Hg) and lead(Pb) that makes them unsuitable for disposal with domestic waste. You may return spent batteries/ accumulators free of charge to recycling centres or anywhere else batteries/accumulators are sold.

By doing so, you contribute to the conservation of our environment!

MIPRO Electronics Co., Ltd


Headquarters: NO. 814, Beigang Rd., Chiayi City 600079, Taiwan

Tel : +886-5-238-0809

Fax : +886-5-238-0803

www.mipro.com.tw

mipro@mipro.com.tw



2CE689B

All rights reserved. Do not copy or forward without prior approvals of MIPRO.
Specifications and design subject to change without notice. YM 024/05