
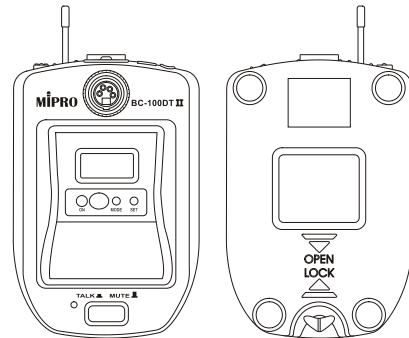


BC-100DT II UHF Gooseneck Microphone Transmitter Base

Features

- Compatible with MM series 4-pin gooseneck microphones, offering both wired and wireless transmission options.
- For wired transmission, connect the base output to a mixer input with phantom power.
- For wireless transmission, it includes a built-in 72 MHz transmitter, compatible with the ACT-800 series digital wireless system, and works like a bodypack transmitter.
- Powered by a rechargeable 18500 lithium-ion battery, which can be charged externally or replaced with a spare battery.
- Equipped with TALK and MUTE buttons to control the base indicator light and sync with the LED ring lights of MM-206L, MM-205L, and MM-204L microphones.
- The sturdy metal base with a non-slip pad ensures stability and prevents wobbling.



Specifications

| | |
|------------------|---|
| Frequency Band | UHF 480 – 934 MHz |
| Receiver | ACT-800 Series |
| Input Jack | MIPRO 4-Pin XLR, compatible with MM-206L / MM-205L / MM-204L gooseneck microphone |
| Output Jack | 3-Pin XLR |
| Control Switch | TALK / MUTE switch, with a LED status indicator |
| Power Supply | Wired: DC 24 – 48 V phantom power Wireless: one 18500 Li-ion battery |
| Charging Voltage | DC 5 V / 1 A |
| Color | Black |
| Dimensions | 100 × 78 × 150 mm (W × H × D) |
| Weight | Approx. 710 g |